

YCS6-C Surge Protection Device

A



General

YCS6-C series Surge Protection Device is suitable for TT, IT, TN-S, TN-C and TN-C-S, the power supply system with the rated voltage up to 230/400V and AC 50/60Hz. It can work as the equipotential bonding when the lightning strike. Its design corresponds to IEC61643-1.


The product is mainly applied to protect the low voltage electric equipment and prevent the surge causing by the thunder or switching overvoltage. As a univoltage limiting device, YCS6-C is equipped with the heavy-duty Zinc Oxide piezoresistor.

YCS6-C series (Protection level: II) Protection Device need to be installed on the up link of the equipment, connecting with outer conductor(L) or neutral conductor(N) and the earthing device. Users can install the YCS6-C in the boundary of LPZOA or LPZ1, usually in the incoming line low voltage main distribution box.

Specifications

Parameters	Product Model				YCS6-C							
Rated Operating Voltage Uc(V~)	110V	220V	380V		220V	380V						
Maximum Continuous Operating Voltage Uc(V~)	140V	275V	320V	385V	420V	440V	275V	320V	385V	420V	440V	
Voltage Protection Level Up(V~)kV	≤0.8	≤1.2	≤1.5	≤1.8	≤2.0	≤2.2	≤1.0	≤1.4	≤1.5	≤1.8	≤2.0	
Nominal Discharge Current In(8/20μs)kA	20						15					
Maximum Discharge Current Imax(8/20μs)kA	40						30					
Response Time ns	< 25											
Test Standard	IEC61643-1											
L/N(mm2)The Cross Section of L/N Line	2.5											
PE(mm2)The Cross Section of PE Line	6											
Fuse or Switch(A)	32A						25A, 32A					
Operating Environment℃	-40℃~+85℃											
Relative Humidity(25℃)	≤95%											
Installation	Standard Rail 35mm											

Overall and mounting dimensions(mm)

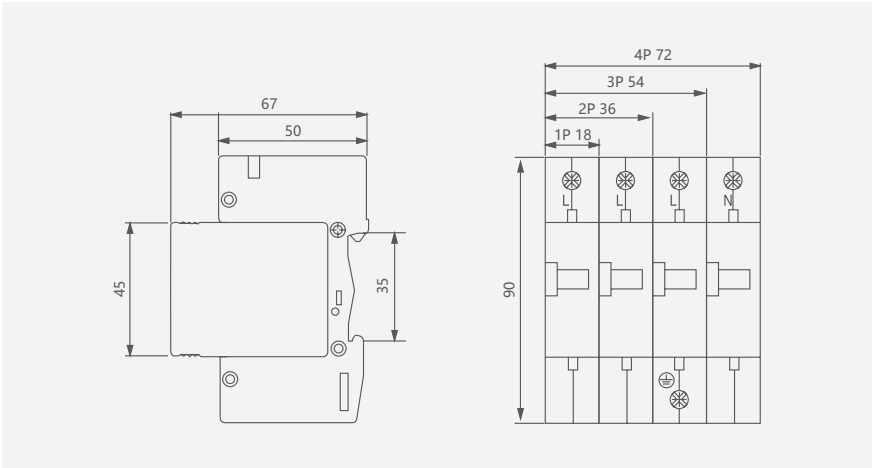

A