


MODEL	MP 10000-PRO
Performance	
Nominal Voltage	51.2 Vdc
Nominal Capacity	200 Ah
Battery Energy	10.24 kWh
Standard Charge/Discharge Current	100 A
Charge Power	5.12 kW
Max Charge/Discharge Current	200 A
Discharge Power	10.24 kW
Communication	
Display	SOC status indicator, LED indicator
Communication	CAN, RS485
General Specification	
Dimension (WxDxH mm)	870 x 555 x 200
Weight (kg)	84 kg
Installation	Floor Stand
Operating Temperature	Charge: 0-55°C / Discharge: -30°C - 60°C
Operating /Storage Humidity	≤95% RH
Max Operating Altitude	≤2000 m
IP Rating	IP20
Cell Technology	LiFePO4, Lithium Iron Phosphate
Scalability	Max 15 batteries in parallel
Standard Compliance (more available upon request)	
Certificates	CE, UN38.3
Ordering And Deliverable Part	
Product Ordering Part	MP 10000-PRO Battery (Cable included)

* Product specifications are subject to change without prior notice for continuous improvement

ON/OFF GRID SOLAR HYBRID HOME SYSTEM

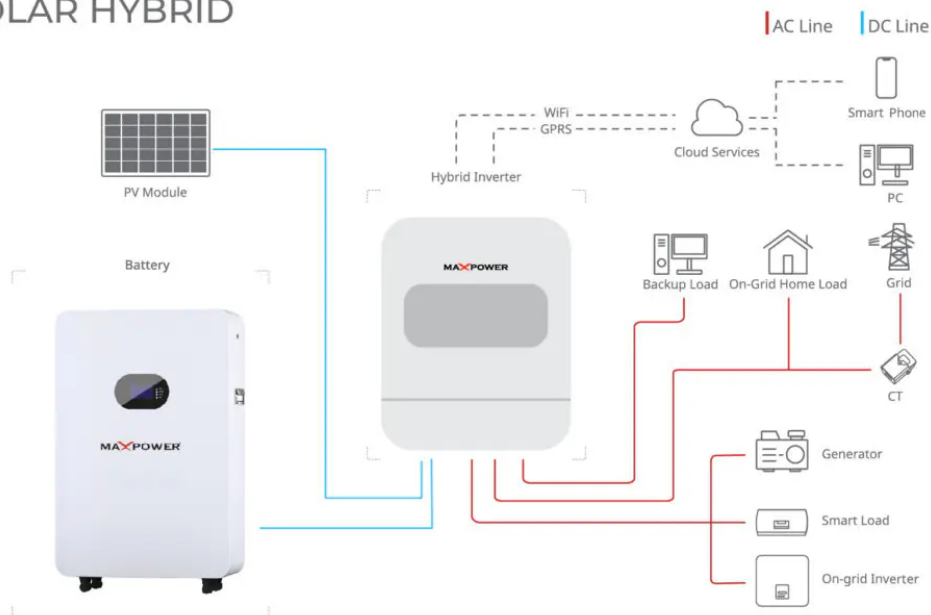

COMPATIBLE INVERTERS BRANDS

