


MODEL	MP 2500-Pro
Performance	
Nominal Ratings	25.6 V, 100 Ah, 2560 Wh
Bulk Charge V	28.8 V
Float Charge V	27.6 V
Low Voltage	25.6 V
Cutoff Voltage	21.6 V
Standard Charge/Discharge Current	50 A
Max. Charge/Discharge Current	100 A
Communication	
Display	SOC status indicator, LED indicator
Communication	CAN, RS485,
General Specification	
Dimension (WxDxH mm)	405 x 160 x 414
Weight (kg)	26 kg
Installation	Wall and Ground mounted
Display	SOC status indicator, LED Indicator
Operating Temperature	Charge: 0-55°C / Discharge: -30°C-60°C
Operating / Storage	≤95% RH
Max Operating Altitude	≤2000 m
IP Rating	IP20
Cell Technology	LiFePO4, Lithium Iron Phosphate
Scalability	Max 15 batteries in parallel
Standard Compliance (more available upon request)	
Certificates	CE, UN38.3
Ordering and Deliverable Part	
Product Ordering Part	MP2500-PRO

* Product specifications are subject to change without prior notice for continuous improvement

ON/OFF GRID SOLAR HYBRID HOME SYSTEM

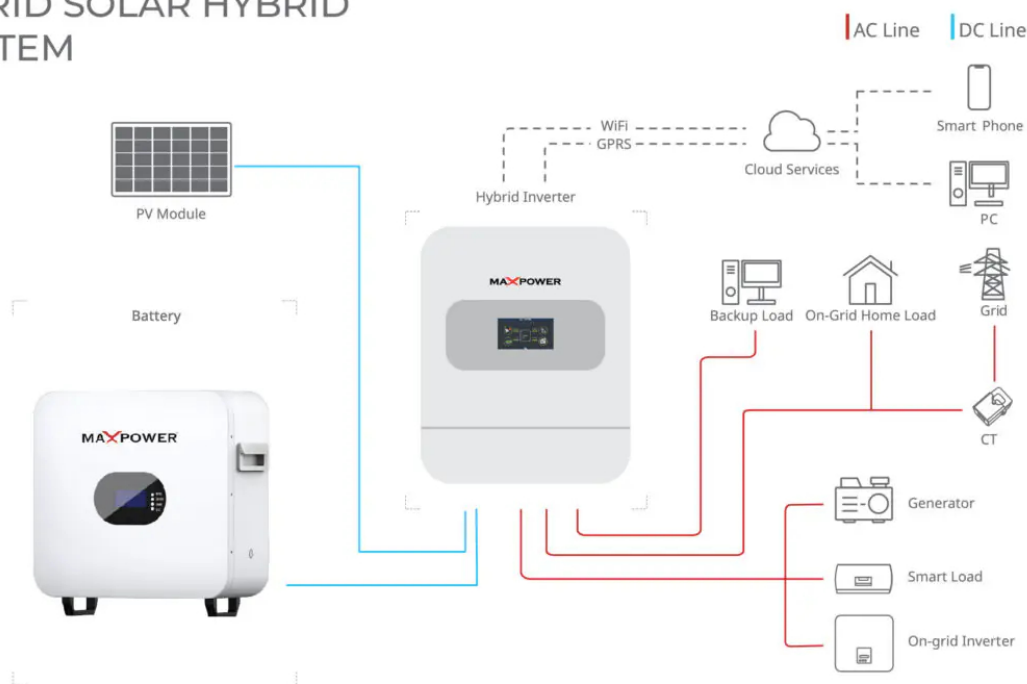

COMPATIBLE INVERTERS BRANDS

